


Flux Coated Cadmium-Free Silver Brazing Rod

# EutecRod<sup>®</sup> 1020 FC

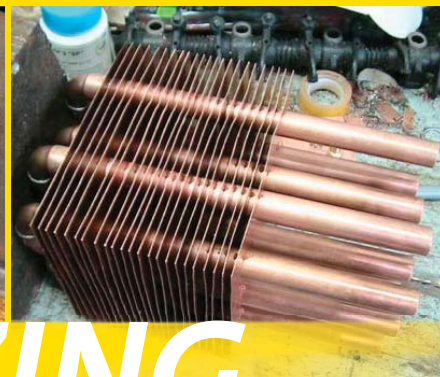

## BRAZING

- Anti-glare flux coating, easy on the eyes
- Low zinc content minimizes problems due to excessive heating
- No preparatory fluxing necessary
- Excellent fluidity for joint clearances of .001 - .005 inches
- Suitable for brazing thin sections or thin cracks
- Often used with silver or stainless steel due to its color match



## DESCRIPTION:

EutecRod 1020 FC is a cadmium - free flux coated silver brazing alloy filler metal rod that has the lowest brazing temperature, best wetting, and best flow of all the cadmium-free brazing alloys. Its low zinc content minimizes problems due to excessive heating - by less skilled operators. With EutecRod 1020 FC no preparatory fluxing is necessary.

EutecRod 1020 FC is recommended for brazing stainless steel, nickel or nickel alloys where stress cracking occurs during the heating process. Its suitable for use on steel, stainless steel, copper, copper alloys, nickel, nickel alloys or a combination. It is often used with silver or stainless steel due to its color match.

Generally, the joint strength post-weld of 1020 FC will exceed the strengths of the base metals being joined. Type of joint, design of joint, joint clearances, and brazing procedures will effect the finished joint strength

EutecRod 1020 FC has excellent fluidity for joint clearances of .001 - .005 inches and exhibits good corrosion resistance.

## TECHNICAL DATA:

Solidus:	1145°F (618°C)
Liquidus:	1205°F (651°C)
Brazing Range:	1205°F - 1400°F (651°C - 760°C)
Specific Gravity:	9.49
Density:	4.96 oz/cu.in.
Electrical Conductivity:	11.9 % IACS
Electrical Resistivity:	14.5 Michroh-m-cm
Color, as Brazed:	Light silver
For Joint Clearances:	.001 to .005 inches
Max. Operating Temp.:	400°F (204°C) continuous service 600°F (315°C) intermittent service
Flux Color:	White

## AVAILABILITY

Available in 18" lengths in 3/64", 1/16" and 3/32" diameters. Packaged in 0.5 lb., 1 lb., 2 lb. and 5.5 lb. packs.

## WELDING PARAMETERS:

**Preparation:** The base metal surfaces to be brazed must be clean and free of all dirt, oil, grease and oxides such as rust.

**Finishing:** All the corrosive flux residue must be removed after brazing. Rinse with water while the parts are still warm, or rinse with hot water.

## TYPICAL APPLICATIONS:

Suitable for brazing thin sections of fabricated steel boxes, butt joints, fixtures, brass wave guides, brass/copper radiator repair, heat exchangers (thin cracks) and valves

YOUR RESOURCE FOR PROTECTION, REPAIR AND JOINING SOLUTIONS



**Eutectic Corporation**  
N94 W14355 Garwin Mace Drive  
Menomonee Falls, WI 53051 USA  
P 800-558-8524 • F 262-255-5542  
[www.eutectic.com](http://www.eutectic.com)

**Eutectic Services**  
12300 Carmen Avenue  
Milwaukee, WI 53225 USA  
P 800-558-8524 • F 262-255-5542



Statement of Liability: Due to variations inherent in specific applications, the technical information contained herein, including any information as to suggested product applications or results, is presented without representation or warranty, expressed or implied. Without limitation, there are no warranties of merchantability or of fitness for a particular purpose. Each process and application must be fully evaluated by the user in all respects, including suitability, compliance with applicable law and non-infringement of the rights of others, and Eutectic Corporation and its affiliates shall have no liability in respect thereof.

1020 07-15 © 2008, Eutectic Corporation, © Reg. T.M., Printed in the U.S.A.