


Flux Coated Cadmium-Free Silver Brazing Rod

EutecRod[®] 1030 FC

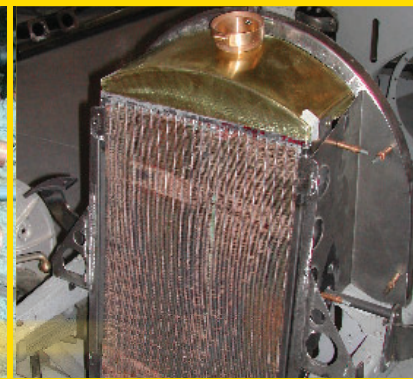

BRAZING

- Usefull for parts with no uniform clearance
- Extremely flexible flux coating for difficult to reach applications
- Low zinc content minimizes problems due to excessive heating
- No preparatory fluxing necessary
- Recommended for brazing stainless steel, nickel or nickel alloys where stress cracking occures during the heating process
- Suitable for brazing thin sections or thin cracks
- Good corrosion resistance



DESCRIPTION:

A white colored, flux coated, brazing rod. Available in 18" lengths in 1/16" and 3/32" diameters. Packaged in 1 lb. and 5.5 lb. packs.

TECHNICAL DATA:

Solidus:	1145°F (618°C)
Liquidus:	1205°F (651°C)
Brazing Range:	1205°F - 1400°F (651°C - 760°C)
Specific Gravity:	9.49
Density:	4.96 oz/cu.in.
Electrical Conductivity:	11.9 % IACS
Electrical Resistivity:	14.5 Michroh-m-cm
Color, as Brazed:	Light silver
For Joint Clearances:	.001 to .005 inches
Max. Operating Temp.:	400°F (204°C) continuous service 600°F (315°C) intermittent service

AVAILABILITY

Available in 18" lengths in 3/64", 1/16" and 3/32" diameters. Packaged in 0.5 lb., 1 lb., 2 lb. and 5.5 lb. packs.

WELDING PARAMETERS:

Preparation: The base metal surfaces to be brazed must be clean and free of all dirt, oil, grease and oxides such as rust.

Finishing: All the corrosive flux residue must be removed after brazing. Rinse with water while the parts are still warm, or rinse with hot water.

TYPICAL APPLICATIONS:

Suitable for brazing thin sections of fabricated steel boxes, butt joints, fixtures, brass wave guides, brass/copper radiator repair, heat exchangers (thin cracks) and valves

YOUR RESOURCE FOR PROTECTION, REPAIR AND JOINING SOLUTIONS



EUTECTIC CORPORATION
N94 W14355 Garwin Mace Drive
Menomonee Falls, WI 53051 USA
Tel.: +1 (800) 558-8524
eutectic.com

EUTECTIC CANADA
428, rue Aimé-Vincent
Vaudreuil-Dorion, Québec
J7V 5V5 Canada
Tel.: +1 (800) 361-9439
eutectic.ca



Statement of Liability: Due to variations inherent in specific applications, the technical information contained herein, including any information as to suggested product applications or results, is presented without representation or warranty, expressed or implied. Without limitation, there are no warranties of merchantability or of fitness for a particular purpose. Each process and application must be fully evaluated by the user in all respects, including suitability, compliance with applicable law and non-infringement of the rights of others, and Eutectic Corporation and its affiliates shall have no liability in respect thereof.

1030 06/17 © 2008, Eutectic Corporation, © Reg. T.M., Printed in the U.S.A.