
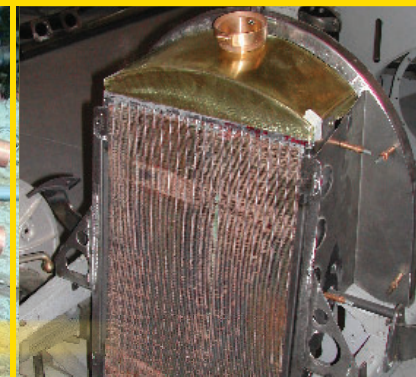


Cadium-Free Silver Brazing Rod

# EutecRod<sup>®</sup> 1601

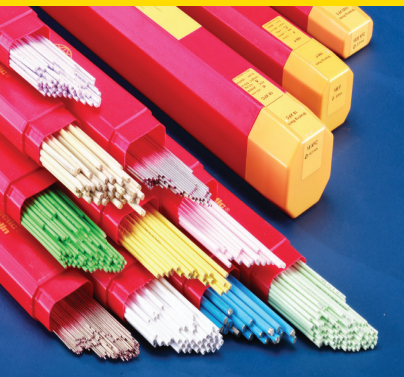

## BRAZING

- Cadmium - free bare rod general purpose brazing alloy
- widely used on joints where greater corrosion resistance is needed
- It exhibits good wetting action and flow
- Useful in bridging gaps where poor joint fitups cannot be avoided
- Excellent corrosion resistance
- Joint clearances of .003 - .008 inches recommended for proper capillary action



## DESCRIPTION:

A bare brazing rod requiring preparatory fluxing with XuperBraz 100 or Xuper Braz 100H. Available in 18" lengths in 1/16" diameter. Packaged in 0.5 lb. and 1 lb. packs.

## TECHNICAL DATA:

Solidus:	1220°F
Liquidus:	1435°F
Brazing Range:	1435°F - 1585°F
Specific Gravity:	9.04
Density:	4.76 oz/cu.in.
Electrical Conductivity:	16.8 % IACS
Electrical Resistivity:	10.27 Michroh-m-cm
Color,as Brazed:	Light Yellow
For Joint Clearances:	.003 to .008 inches

The recommended maximum operating temperature of 1601 is up to 400°F in continued service and up to 600°F in intermittent service.

## SPECIFICATION:

### 2. ASME BAg-4

Generally, the joint strength using 1601 will exceed the strengths of the base metals being joined. Type of joint, design of joint, joint clearances, and brazing procedures will effect the finished joint strength.

## WELDING PARAMETERS:

**Preparation:** The base metal surfaces to be brazed must be clean and free of all dirt, oil, grease and oxides such as rust.

**Finishing:** All the corrosive flux residue must be removed after brazing. Rinse with water while the parts are still warm, or rinse with hot water.

## TYPICAL APPLICATIONS:

Suitable for brazing tungsten carbide inserts, general tool tipping, and stainless steel food containers and food handling equipment. Used where greater corrosion resistance is required.

## YOUR RESOURCE FOR PROTECTION, REPAIR AND JOINING SOLUTIONS



**EUTECTIC CORPORATION**  
N94 W14355 Garwin Mace Drive  
Menomonee Falls, WI 53051 USA  
Tel.: +1 (800) 558-8524  
eutectic.com

**EUTECTIC CANADA**  
428, rue Aimé-Vincent  
Vaudreuil-Dorion, Québec  
J7V 5V5 Canada  
Tel.: +1 (800) 361-9439  
eutectic.ca



Statement of Liability: Due to variations inherent in specific applications, the technical information contained herein, including any information as to suggested product applications or results, is presented without representation or warranty, expressed or implied. Without limitation, there are no warranties of merchantability or of fitness for a particular purpose. Each process and application must be fully evaluated by the user in all respects, including suitability, compliance with applicable law and non-infringement of the rights of others, and Eutectic Corporation and its affiliates shall have no liability in respect thereof.

1601 06/17 © 2008, Eutectic Corporation, © Reg. T.M., Printed in the U.S.A.